

# Video led DCUBE III 2.6

Pixel pitch (mm)	2.6
LED Type	SMD 3 IN 1 - SMD2020 NATIONSTAR GOLDWIRE CONTACT
PixelPixel m2	147456
Dimension (mm)	500 (W) x 500 (H) x 75(D)
Panel Res WxH (pixels)	192 x 192
Manufacturing Material	Alluminum
Panel Weight (Kg)	9
Refresh Rate (Hz)	3.840
Input power frequency	50 o 60 Hz
Grey Scale	16 bit
Input Voltage	110 ~ 240 Volt
Viewing Angle VxH(Deg)	130(+65/-65) / 160 (+80/-80)
Driver	MBI5153
Brightness (cd/ m2)	>1000
Power Cons. (W/m2)	Max 700
Power Cons. (W/m2)	AWG 220
Operating temperature	-20 to +50 (C°)
IP Protection	IP 20
Lifetime (50% Brightness)	100000 h
Blind spot rate	<1/10000
Certifications	CE - EMC – RoHS
Receiving Card	Novastar A4S



**FOR  
RENT**



**easy**



**curved**




**INDOOR**



Sistema di  
curvatura

Moduli led 25x50 cm

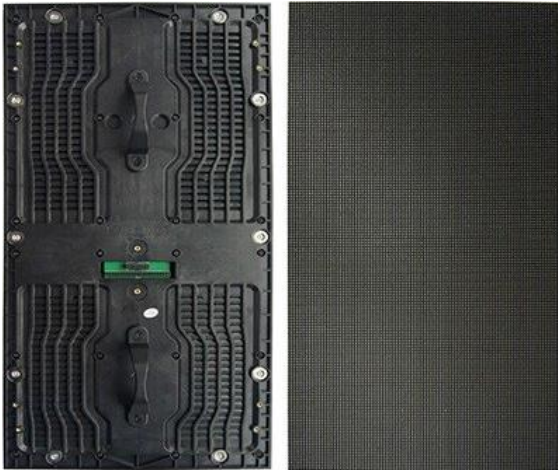

ANGOLI  
TOTALMENTE  
PROTETTI  
DA INSERTO  
METALLICO, IN  
FASE DI  
TRASPORTO



## CARATTERISTICHE

- PROGETTATO PER ESEGUIRE SCHERMI CURVI E CONVESSI CON UN'ANGOLAZIONE DI +5/-5 GRADI CON SISTEMA STABILE "SLIDE"
- CABINET COMPLETAMENTE IN ALLUMINIO
- ASSISTENZA FRONTALE (\*) E POSTERIORE
- FACILE RIMOZIONE DEI PANNELLI FRONTALI GRAZIE AL SISTEMA DI FISSAGGIO MAGNETICO. LA SOSTITUZIONE DEL BOX DI ALIMENTAZIONE E' SEMPLICE E PUÒ ESSERE ESEGUITA IN POCHI SECONDI E SENZA UTENSILI
- RISPARMIO DEI COSTI DI SPEDIZIONE E DI STOCCAGGIO GRAZIE AL SUO PESO DI SOLI 9 KG/PANNELLO

