

Video led DCUBE III 2.9

Pixel pitch (mm)	2.97
LED Type	SMD 3 IN 1 - SMD2020 NATIONSTAR GOLDWIRE CONTACT
PixelPixel m2	112896
Dimension (mm)	500 (W) x 500 (H) x 75(D)
Panel Res WxH (pixels)	168 x 168
Manufacturing Material	Alluminum
Panel Weight (Kg)	9
Refresh Rate (Hz)	3.840
Input power frequency	50 o 60 Hz
Grey Scale	16 bit
Input Voltage	110 ~ 240 Volt
Viewing Angle VxH(Deg)	130(+65/-65) / 160 (+80/-80)
Driver	MBI5153
Brightness (cd/ m2)	>1000
Power Cons. (W/m2)	Max 700
Power Cons. (W/m2)	AWG 220
Operating temperature	-20 to +50 (C°)
IP Protection	IP 20
Lifetime (50% Brightness)	100000 h
Blind spot rate	<1/10000
Certifications	CE - EMC – RoHS
Receiving card	Novastar A4S



**FOR
RENT**



easy



curved




INDOOR



Sistema di curvatura

Distribuito per l'Italia da Mods Art Srl
Via Incoronata 155 66054 Vasto (CH)
Il prodotto potrebbe subire modifiche senza preavviso

Moduli led 25x50 cm

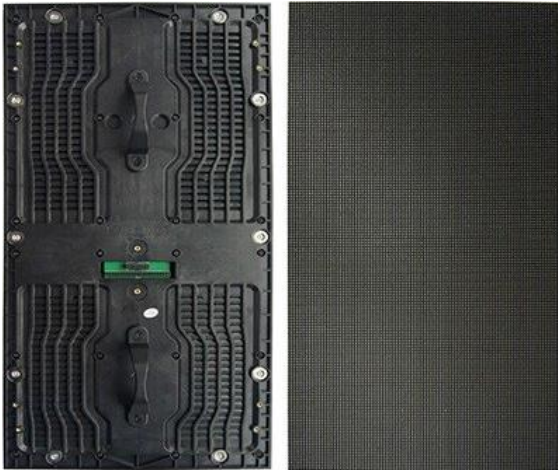

ANGOLI
TOTALMENTE
PROTETTI
DA INSERTO
METALLICO, IN
FASE DI
TRASPORTO



CARATTERISTICHE

- PROGETTATO PER ESEGUIRE SCHERMI CURVI E CONVESSI CON UN'ANGOLAZIONE DI +5/-5 GRADI CON SISTEMA STABILE "SLIDE"
- CABINET COMPLETAMENTE IN ALLUMINIO
- ASSISTENZA FRONTALE (*) E POSTERIORE
- FACILE RIMOZIONE DEI PANNELLI FRONTALI GRAZIE AL SISTEMA DI FISSAGGIO MAGNETICO. LA SOSTITUZIONE DEL BOX DI ALIMENTAZIONE E' SEMPLICE E PUÒ ESSERE ESEGUITA IN POCHI SECONDI E SENZA UTENSILI
- RISPARMIO DEI COSTI DI SPEDIZIONE E DI STOCCAGGIO GRAZIE AL SUO PESO DI SOLI 9 KG/PANNELLO

