

Video led DCUBE III 4.81 out

Pixel pitch (mm)	4.81
LED Type	SMD 3 IN 1 - SMD2727
PixelPixel m2	43264
Dimension (mm)	500 (W) x 500 (H) x 75(D)
Panel Res WxH (pixels)	104 x 104
Manufacturing Material	Alluminium
Panel Weight (Kg)	8,5
Refresh Rate (Hz)	>1920
Input power frequency	50 o 60 Hz
Input Voltage	110 ~ 240 Volt
Viewing Angle VxH(Deg)	140(+70/-70) / 140 (+70/-70)
Driver	MBI5124
Brightness (cd/ m2)	5000
Power Cons. (W/m2)	Max 720
Power Cons. (W/m2)	AWG 300
Operating temperature	-20 to +50 (C°)
IP Protection	IP 65
Lifetime (50% Brightness)	100000 h
Blind spot rate	<1/10000
Certifications	CE - EMC – RoHS




**FOR
RENT**



easy



curved

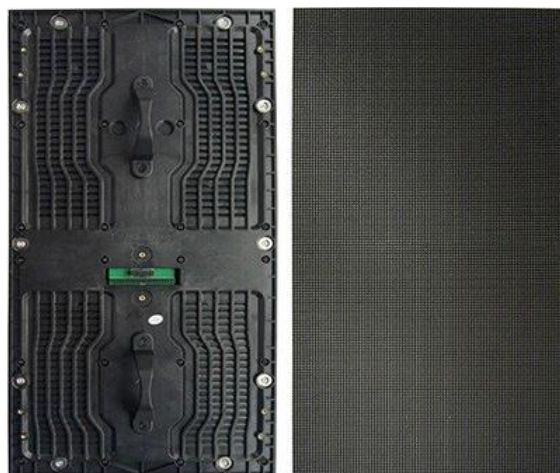

Moduli led 25x50 cm



Distribuito per l'Italia da Mods Art Srl
Via Incoronata 155 66054 Vasto (CH)
Il prodotto potrebbe subire modifiche senza preavviso

Turns Excellence Into Classic

Innovative technology, comprehensive upgrade—Devoted to produce the best used stage rental screen



Modularization Design

You can disassemble cabinet, modules and power supplies with your hands quickly




Curve Instalation Available

Inner 18 degree; outer 18 degree;
(except Outdoor 3.91)



Convex

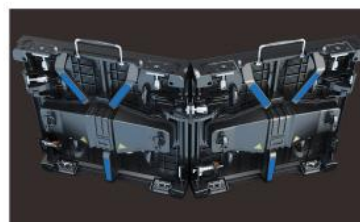

Concave